


INTEGRAL SEAL SCREWS

PAN HEAD - SLOTTED DRIVE TYPE

**CLASS 2A
THREAD**

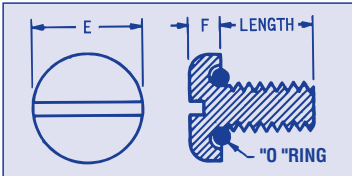

SPECIFICATIONS:


Material: Screw - Series #300 stainless steel

"O"-Ring- Silicone rubber. Viton A, Buna-N, available on request.

Temperature Range: -160°F to +500°F depending on material used.

Pressure Range: 0-6000 psi depending on clearance hole dimension.

Tolerances are shown in inches.

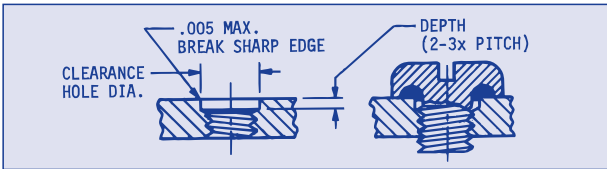

NOTE:

- 1) A clearance hole is required for maximum sealing.
- 2) Screw can be reused, still retaining its sealing characteristics.

Inch Sizes

Thread Size	Cat. No.	Length *	E Max.	F Max.	Recom. Clear. Hole	
					Min.	Max.
2-56NC	DLX-A1-3	1/4	.168	.055	.091	.095
	DLX-A1-5	3/8				
	DLX-A1-6	1/2				
	DLX-A1-7	5/8				
4-40NC	DLX-A2-3	1/4	.220	.069	.125	.129
	DLX-A2-6	1/2				
	DLX-A2-8	3/4				
	DLX-A2-9	1				
6-32NC	DLX-A3-3	1/4	.271	.083	.147	.152
	DLX-A3-6	1/2				
	DLX-A3-8	3/4				
	DLX-A3-9	1				
8-32NC	DLX-A4-3	1/4	.323	.097	.173	.179
	DLX-A4-6	1/2				
	DLX-A4-8	3/4				
	DLX-A4-9	1				
10-32NF	DLX-A5-5	3/8	.374	.113	.199	.204
	DLX-A5-6	1/2				
	DLX-A5-8	3/4				
	DLX-A5-9	1				
10-24NC	DLX-A6-5	3/8	.374	.113	.199	.204
	DLX-A6-6	1/2				
	DLX-A6-8	3/4				
	DLX-A6-9	1				
1/4-20UNC	DLX-A7-5	3/8	.493	.148	.265	.269
	DLX-A7-6	1/2				
	DLX-A7-8	3/4				
	DLX-A7-9	1				
	DLX-A7-11	1-1/4				

*Screws are available in increments of 1/16" up to 5/8" length, in increments of 1/8" from 5/8" length and up. Please consult factory for price and availability of unlisted sizes. **Metric Sizes**

NEW

Cat No.	Thread Size	Length	F	E	Clearance Holes	
					Min	Max
DLX-M1-1 DLX-M1-2 DLX-M1-3	M2 x 0,4	4,00	1,37	4,24	2,31	2,41
		8,00				
		12,00				
DLX-M1-4 DLX-M1-5 DLX-M1-6	M3 x 0,5	6,00	1,91	6,22	3,56	3,66
		12,00				
		20,00				
DLX-M1-7 DLX-M1-8 DLX-M1-9	M4 x 0,7	6,00	2,44	8,18	4,39	4,55
		12,00				
		20,00				
DLX-M1-10 DLX-M1-11 DLX-M1-12	M6 x 1,0	12,00	3,73	12,50	6,73	6,83
		20,00				
		25,00				

NORDEX

(800) 243-0986 27D
In CT (203) 775-4877